




Science.
Applied to Life.™

Protect and insulate.

3M Electrical OEM Insulation and Conductive Tapes/EMI Shielding Tapes
Interactive product selection guide

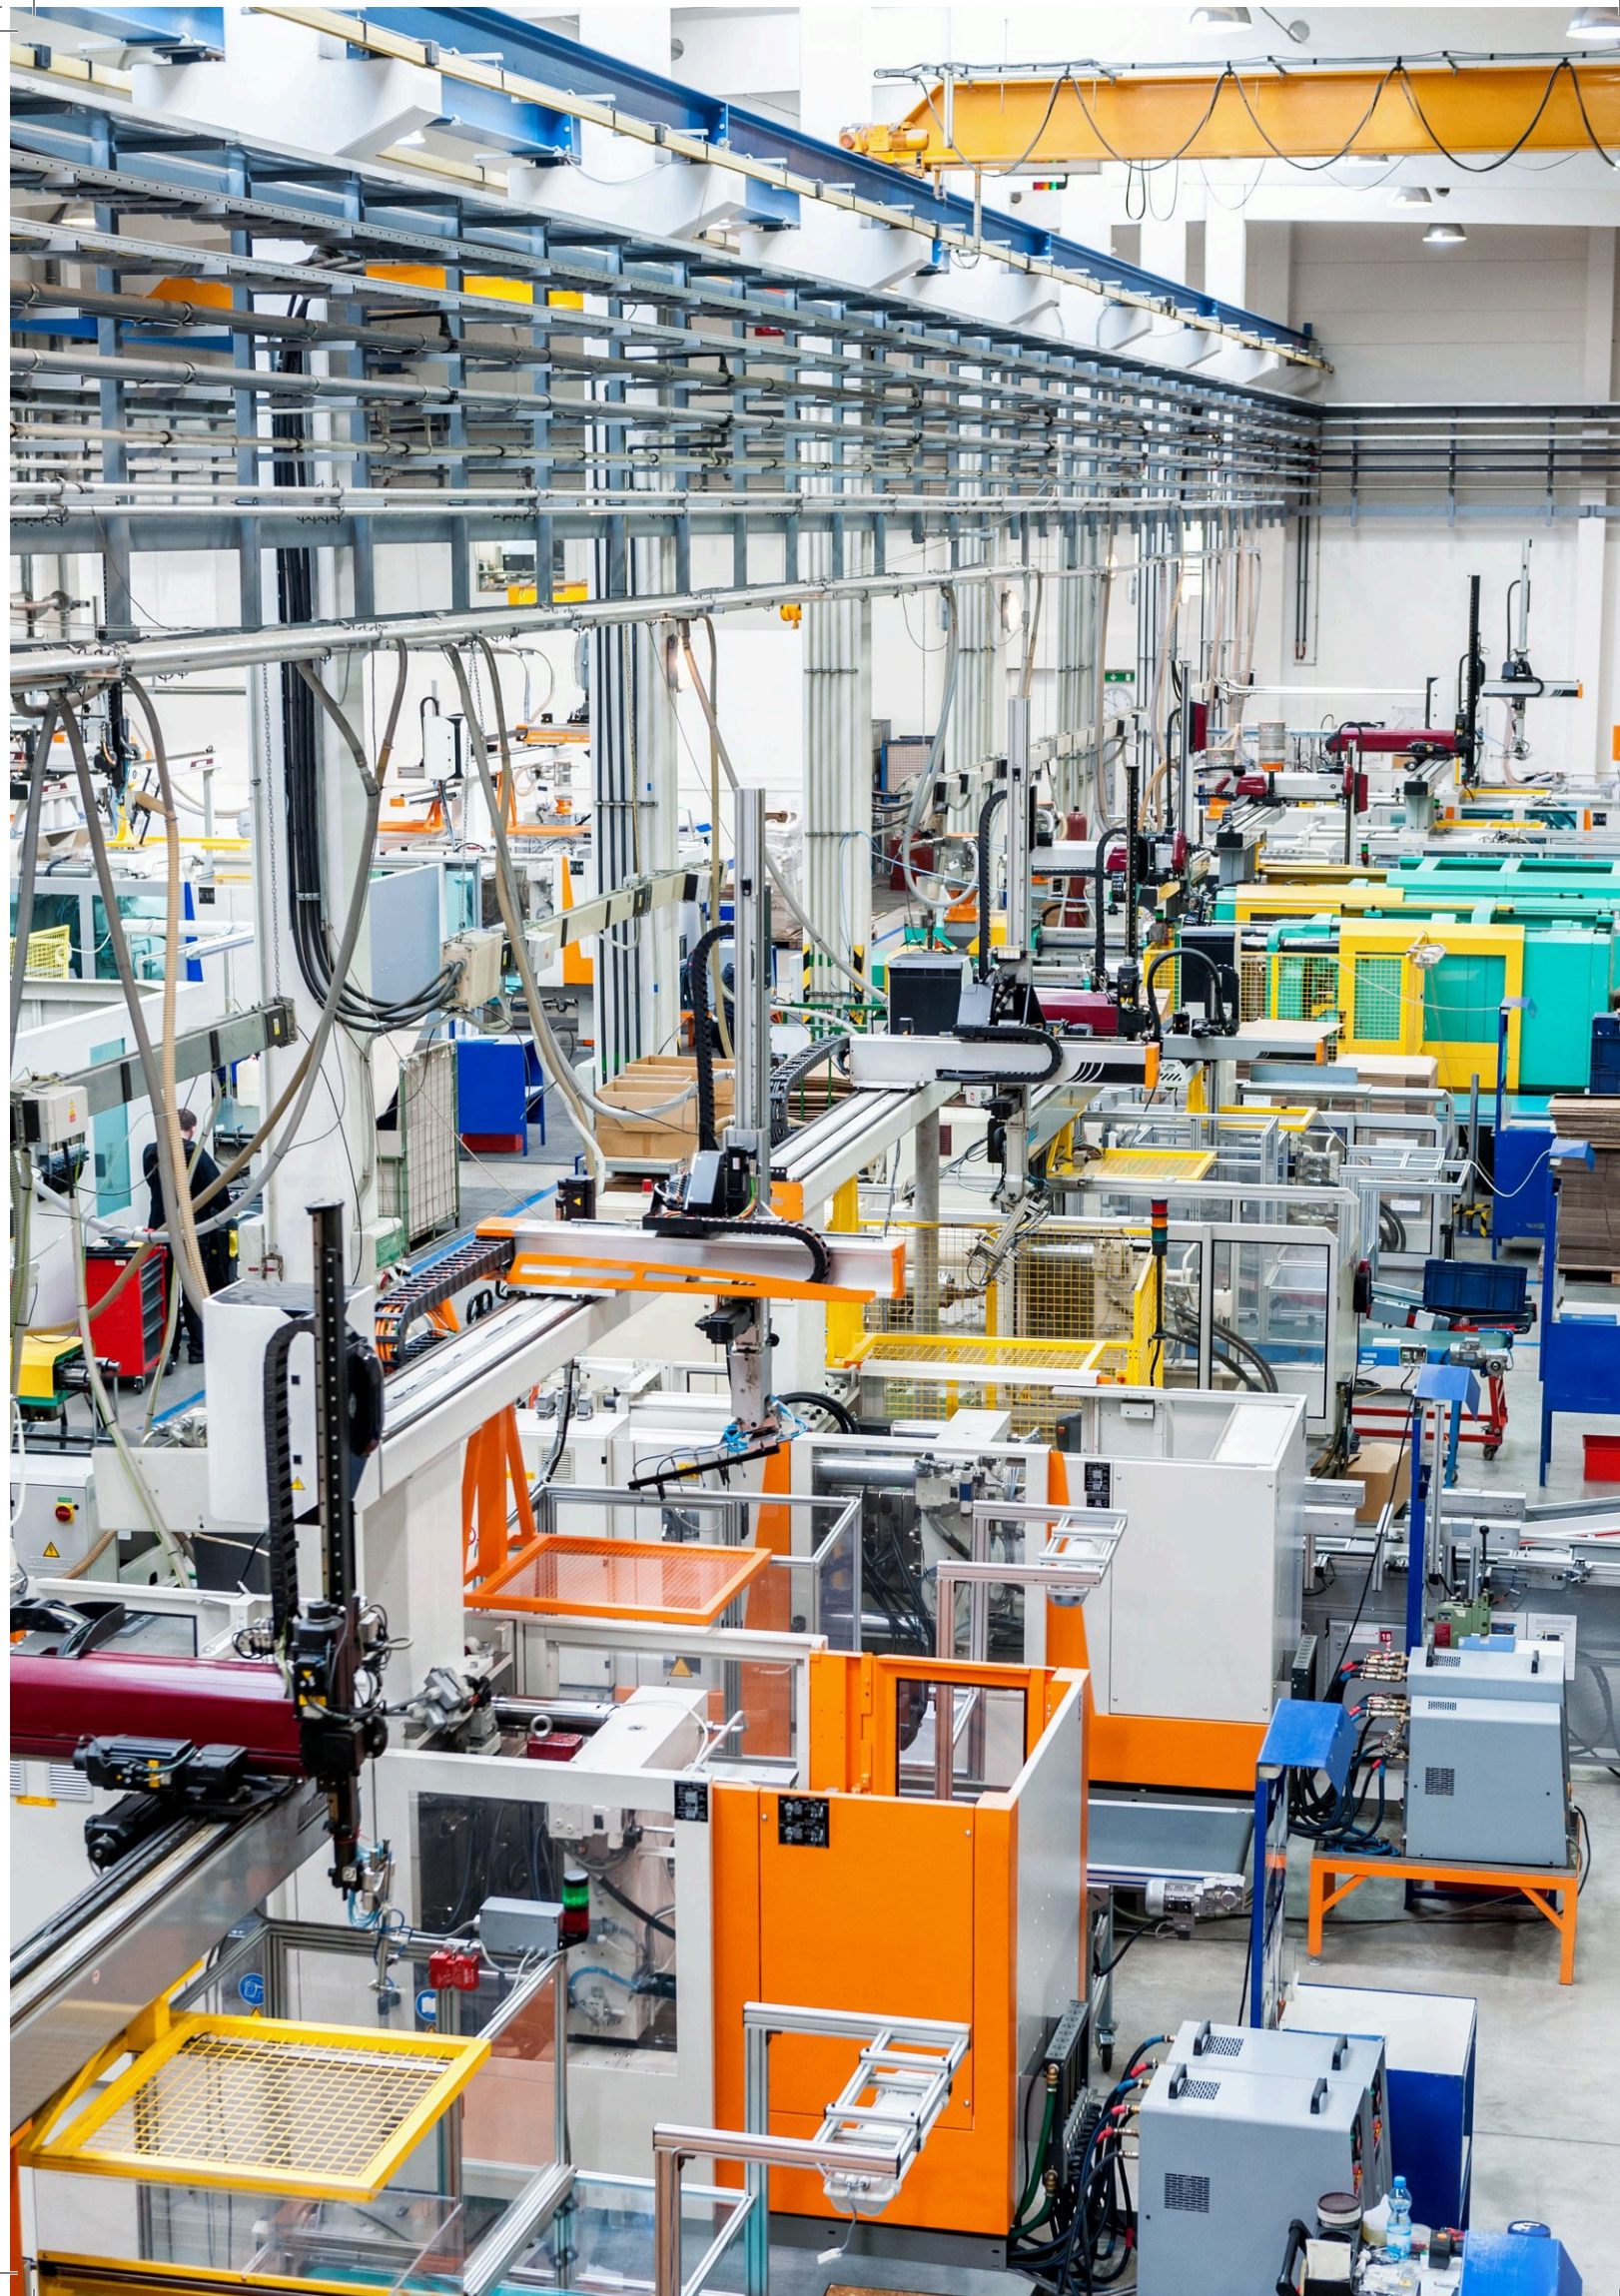

Contents

3M™ Insulating and Conductive Tapes are made from a broad range of backings and adhesives to keep up with the demanding requirements of different applications and environments. Extensive quality control and testing, combined with extensive process controls, are just part of the reason that 3M™ consistently provides high quality products.

3M™ Electrical Tapes	2
Glass cloth	2
Filament reinforced	3
Acetate cloth	4
Paper	4
Epoxy film	5
Polyester film	6
Polyimide film	8
Composite film	9
Vinyl	10
 3M™ Conductive and EMI Shielding Tapes	 11
3M™ Speciality Tapes	13
Industry specifications	14
About 3M™ Insulating and Conductive Tapes.	16
Tape construction	18
3M™ Flexible Insulation Products	20


For all products: Listed properties are considered average (typical) values a customer could expect and should not be used for specification purposes. Please review the applicable data sheet for minimum, maximum and range specification property values where applicable. A Certificate of Analysis (CoA) can be requested when placing an order.

3M™ Electrical Tapes

Glass cloth

3M™ offers exceptionally flexible and conformable glass cloth backings with high-temperature resistance and tensile strength. With excellent absorption of resins and varnishes plus cut-through and edge-tear resistance, they are ideal for holding and strapping applications up to 200°C.

Available with three (3) adhesive systems: thermosetting rubber, solvent-resistant acrylic and high-temperature silicone.

				
	Thermosetting rubber		Acrylic	Silicone
3M™ Glass Cloth Tape	27	90	79	69 UL 94 V-0
Features	High-performance glass cloth tape that is tough and conformable.	Stiffer, saturated backing. Provides different handling.	Solvent-resistant version of 3m tape 27 listed in many class b systems.	High-temperature (200° c) glass cloth tape. UI510a flame retardant.
Operating temp (°c) †	150	155	155	200
Total thickness (mils)/(mm)	7.0/0,177	7.5/0,19	7.0/0,177	7.0/0,177
Dielectric breakdown (v)	3000	3000	3000	3000
Insulation resistance (megaohms)	4.8×10 ⁴	1×10 ²	2.7×10 ²	4.8×10 ⁴
Breaking strength (lb/in)(n/10mm)	150/252	175/306	150/262	180/314
Elongation (% at break)	5	5	5	5
Electrolytic corrosion (3m test method etm 54001)	0.9	0.9	0.9	0.9
Adhesion to steel (oz/in)/(n/10mm)	30/3,3	50/5,5	30/3,3	40/4,4
Cti material group	I	-	I	I



† Operating temperature is equivalent to UL Recognition temperature where applicable (See page 15).


🔥 = Flame retardant. See page 15 for product specifications.

3M™ Electrical Tapes

Filament reinforced

Filament tapes for applications needing both the dielectric strength of polyester film and the high mechanical strength of glass fibres. They offer low stretch, high tensile and edge-tear resistance for a more cost-effective solution to glass cloth tapes. Excellent for anchoring lead wires to banding coils and end-turn taping. A special paper-backed filament tape is available for high-voltage oil-filled distribution transformer use.

Available with two (2) adhesive systems: thermosetting rubber resin and solvent-resistant acrylic.

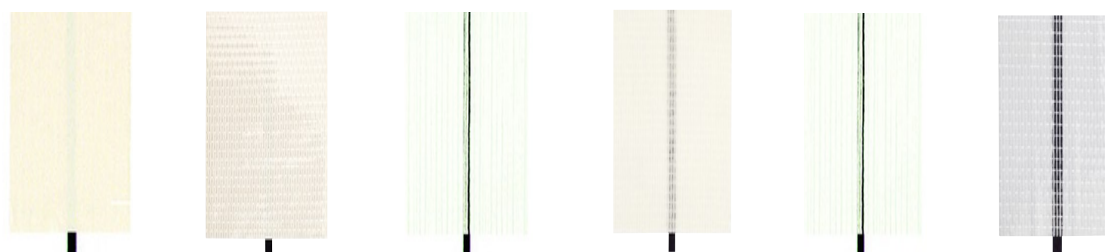

Thermosetting rubber			Acrylic			
3M™ Filament Tape	46 ⚡ Ⓢ	1046 ⚡	1139 ⚡ Ⓢ	1076	1339 ⚡ Ⓢ	1039 ⚡
Features	Tough, durable filament tape.	Tough, durable filament tape.	Solvent-resistant, high-temperature filament tape.	Paper/glass filament backing for oil-filled transformer applications.	Solvent-resistant filament tape. More conformable.	Solvent-resistant filament tape. More conformable.
Operating temp (°C) †	130	130	155	105	130	130
Total thickness (mils)/(mm)	7.0/0,177	7.0/0,177	6.5/0,165	10.0/0,253	6.5/0,165	7.0/0,177
Dielectric breakdown (v)	5500	5500	5500	3500	5500	5500
Insulation resistance (megaohms)	3×10 ³	3×10 ³	-	-	1×10 ⁵	1×10 ⁵
Breaking strength (lb/in) (n/10mm)	275/481	275/481	225/394	275/481	275/481	275/481
Elongation (% at break)	5	5	6	5	5	5
Electrolytic corrosion (3m test method etm 54001)	1.0	1.0	-	1.0	1.0	1.0
Adhesion to steel (oz/in)/(n/10mm)	50/5,4	50/5,4	35/3,8	40/4,4	35/3,8	35/3,8
Cti material group	II	-	-	-	I	I

† Operating temperature is equivalent to UL Recognition temperature where applicable (See page 15).

3M™ Electrical Tapes

Acetate cloth

These aesthetically pleasing acetate cloth tapes offer excellent conformability in coil-wrapping applications up to 105°C plus excellent absorption of electrical insulating resins and varnishes.

Paper

Paper tapes provide good cushioning, puncture resistance and toughness. Great for use as coil cover on bobbin-wound coil.

Both available with one (1) adhesive system: thermosetting rubber resin.



Thermosetting rubber		
3M™ Acetate Cloth Tape	11	28
Features	Black. Excellent conformability.	White. Excellent conformability.
Operating temp (°C) †	105	105
Total thickness (mils)/(mm)	8.0/0,203	8.0/0,203
Dielectric breakdown (v)	2000	2500
Insulation resistance (megaohms)	2×10 ⁴	2×10 ⁴
Breaking strength (lb/in)(n/10mm)	35/62	35/62
Elongation (% at break)	10	10
Electrolytic corrosion (3m test method etm 54001)	1	1
Adhesion to steel (oz/in)/(n/10mm)	40/4,4	40/4,4
Cti material group		

Thermosetting rubber	
3M™ Paper Tape	12
Features	Flatback backing.
Operating temp (°C) †	105
Total thickness (mils)/(mm)	5.5/0,14
Dielectric breakdown (v)	2000
Insulation resistance (megaohms)	> 1×10 ⁶
Breaking strength (lb/in)(n/10mm)	22/38,5
Elongation (% at break)	–
Electrolytic corrosion (3m test method etm 54001)	–
Adhesion to steel (oz/in)/(n/10mm)	40/4,4
Cti material group	

† Operating temperature is equivalent to UL Recognition temperature where applicable (See page 15).

Epoxy Film

3M™ Epoxy Film tapes offer solder and puncture resistance, high dielectric strength, conformability, and UL recognition for flame retardancy at temperatures up to 155°C. 3M™ Epoxy Film Tapes require fewer wraps to meet dielectric requirements, compared to typical glass cloth tapes. Their versatility can help you reduce your tape inventory.

Available with two (2) adhesive system: thermosetting rubber resin and solvent-resistant acrylic.



Acrylic	Thermosetting rubber
3M™ Epoxy Film Tape	Super 10 UL CE
Features	Thicker epoxy for higher temperature and dielectric. Thermosetting rubber adhesive. UI510a flame retardant.
Operating temp (°c) †	155
Total thickness (mils)/(mm)	5.0/0,127
Dielectric breakdown (v)	8000
Insulation resistance (megaohms)	> 1x10 ⁶
Breaking strength (lb/in)(n/10mm)	45/79
Elongation (% at break)	120
Electrolytic corrosion (3m test method etm 54001)	1.0
Adhesion to steel (oz/in)/(n/10mm)	45/4,9
Cti material group	I



3M™ Electrical Tapes

Polyester film

3M offers a variety of polyester tapes for insulating applications requiring a thin, durable tape with high dielectric strength. They can withstand higher-temperature conditions than tapes with acetate cloth backings. They are also conformable, exhibit excellent chemical, solvent and moisture resistance, and resist cut-through and abrasion.

Available in flame retardant and non-flame retardant versions and with two (2) adhesive systems:
thermosetting rubber resin and solvent-resistant acrylic.




Acrylic								
3M™ Polyester Film Tape	5	1318-1	1350F-1	1350F-2	1351-1	1350T-1	1350T-3	1388-1
	UL 5	UL 1318-1	UL 1350F-1	UL 1350F-2	UL 1351-1	UL 1350T-1	UL 1350T-3	UL 1388-1
Features	1-Mil film. General purpose polyester tape. Clear.	1-Mil film. Black or yellow.	1-Mil film. UL510a flame retardant. Black, white, or yellow.	2-Mil film. UL510a flame retardant. Thicker version of 3m tape 1350f-1. Black, white, or yellow.	1-Mil film. UL510a flame retardant. Smooth, even unwind for use on automatic equipment. White.	1.5-Mil ul510a flame retardant yellow	"3-Mil ul510a flame retardant yellow"	1.5-mil UL510A Halogen-Free Flame Retardant Adhesive Black, white or yellow.
Operating temp (°C) †	130	130	130	130	130	130	130	130
Total thickness (mils)/(mm)	2.5/0,063	2.5/0,063	2.5/0,063	3.5/0,088	2.5/0,063	3.0/0.076	4.5/0.114	2.3/0.058
Dielectric breakdown (v)	5500	5500	5500	7000	5500	≥ 6500	≥ 10000	≥ 5000 AC ≥ 10000 DC
Insulation resistance (megaohms)	>1×10 ⁶	>1×10 ⁶	>1×10 ⁶	>1×10 ⁶	>1×10 ⁶	≥ 1 X 10 ¹²	≥ 1 X 10 ¹²	≥ 1 × 10 ¹²
Breaking strength (lb/in) (n/10mm)	25/44	25/44	25/44	50/88	25/44	42/74	68/119	20/35
Elongation (% at break)	100	100	100	110	100	≥ 50%	≥ 90%	≥ 50%
Electrolytic corrosion (3m test method etm 54001)	1.0	1.0	1.0	1.0	1.0	1.0	1	n.a.
Adhesion to steel (oz/in)/(n/10mm)	35/3,8	30/3,3	30/3,3	30/3,3	30/3,3	25/2.7	25/2.7	26.4/2.9

† Operating temperature is equivalent to UL Recognition temperature where applicable (See page 15).

🔥 = Flame retardant. See page 15 for product specifications.

Polyester film with rubber adhesive

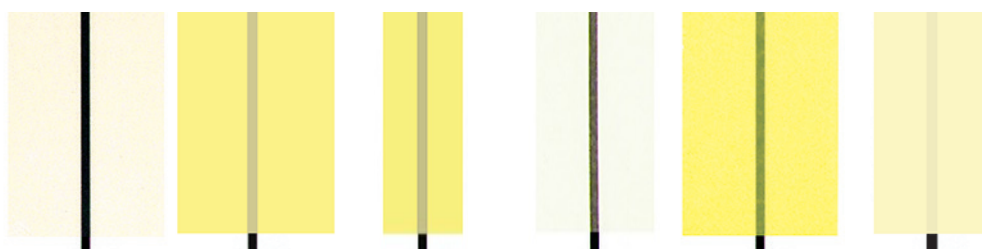

Thermosetting rubber						
3M™ Polyester Film Tape	54 Ⓡ Ⓢ	56 Ⓡ Ⓢ	57 Ⓡ	58 Ⓡ	74 Ⓡ	75 Ⓡ
Features	1-Mil film. General purpose polyester tape. Clear.	1-Mil film. General purpose polyester tape. Yellow.	2-Mil film version of 3m tape 56. Thicker, higher dielectric. Yellow.	2-Mil film version of 3m tape 54. Thicker, higher dielectric. Clear.	0.5-Mil film. Thin for coil applications where space is at a premium.	1-Mil film. Coated on both sides. For use in bonding applications requiring a double positive insulation barrier.
Operating temp (°c) †	130	130	130	130	130	130
Total thickness (mils)/(mm)	2.5/0,063	2.3/0,058	3.3/0,083	3.3/0,083	0.8/0,020	3.8/0,096
Dielectric breakdown (v)	5000	5000	7000	7000	3500	6500
Insulation resistance (megaohms)	>1×10 ⁶	>1×10 ⁶	>1×10 ⁶	>1×10 ⁶	>1×10 ⁶	>1×10 ⁶
Breaking strength (lb/in)(n/10mm)	25/44	25/44	50/88	50/88	12/21	25/44
Elongation (% at break)	100	100	110	110	100	100
Electrolytic corrosion (3m test method etm 54001)	1.0	1.0	1.0	1.0	1.0	1.0
Adhesion to steel (oz/in)/(n/10mm)	45/4,9	50/5,5	60/6,5	60/6,5	20/2,2	45/4,9
Cti material group	I	I	I	I	I	—

† Operating temperature is equivalent to UL Recognition temperature where applicable (See page 15).

The second number is the maximum operating temperature.

Ⓡ = Flame retardant. See page 15 for product specifications.


3M™ Electrical Tapes

Polyimide film

3M™ Polyimide Film tapes are for high-temperature applications requiring a thin puncture-resistant backing. The physical and electrical properties of polyimide remain stable when used in such applications as coils, harnesses, and capacitors, that are subjected to extreme temperatures.

Available with two (2) adhesive systems: solvent-resistant acrylic and high-temperature silicone.

				
Silicone			Acrylic	
3M™ Polyimide Film Tape	92 	98C-1 	1205 	1218 
Features	1-Mil film. High-performance polyimide tape. High-temperature. UL510a flame retardant.	1-mil film polyimide tape. High-temperature UL 510A flame retardant.	1-Mil film. Solvent-resistant version of 3m tape 92. UL510a flame retardant.	1-Mil film. High-temperature and solvent-resistant. UL510a flame retardant.
Operating temp (°c) †	180	220	155	180
Total thickness (mils)/(mm)	3.0/0,076	2.6 /0.66	3.0/0,076	3.0/0,076
Dielectric breakdown (v)	7500	5000	7500	6000
Insulation resistance (megaohms)	>1×10 ⁶	>1 × 10 ⁶	>1×10 ⁶	>1×10 ⁶
Breaking strength (lb/in)(n/10mm)	30/53	26/46	30/53	30/53
Elongation (% at break)	55	30	55	55
Electrolytic corrosion (3m test method etm 54001)	1.0	1	1.0	1.0
Adhesion to steel (oz/in)/(n/10mm)	25/2,8	16.5/1.8	35/3,8	19/2,1
Cti material group	LIIb	n/a	LIIb	lib

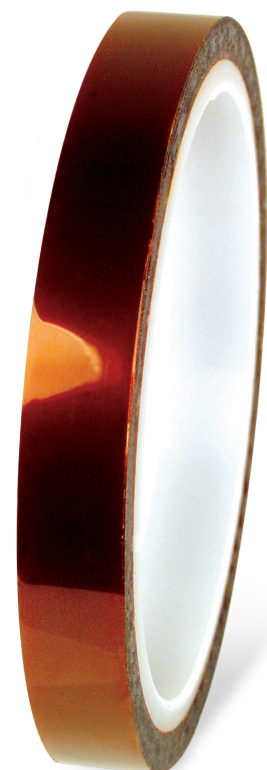

† Operating temperature is equivalent to UL Recognition temperature where applicable (See page 15).

 = Flame retardant. See page 15 for product specifications.

Composite film

3M™ Composite Film Tapes are excellent for general purpose insulation, anchoring, and banding in motors and transformers. They combine the high dielectric strength and edge-tear resistance of polyester film and nonwoven polyester mat for a conformable product with greater puncture resistant and electrical properties.

Available in a variety of thicknesses and with two (2) adhesive systems: thermosetting rubber resin and solvent-resistant acrylic.



Thermosetting rubber				Acrylic	
3M™ Composite Film Tape	44 UL	44HT UL	55 UL	44D-A UL	44T-A UL
Features	Economical, general purpose composite film tape. For general purpose electrical applications. Longer-length rolls.	Composite film tape with aggressive adhesive for motor applications.	Thicker composite film tape for better puncture resistance and higher dielectric applications.	A version of 3m tape 44 with twice the backing thickness for greater dielectric strength.	A version of 3m tape 44 with three times the thickness for greater dielectric strength.
Operating temp (°C) †	130	130	130	130	130
Total thickness (mils)/(mm)	5.5/0,139	5.5/0,139	7.5/0,190	12/0,304	18/0,455
Dielectric breakdown (v)	5500	5500	6000	6000	8500
Insulation resistance (megaohms)	>1×10 ⁶	>1×10 ⁶	>1×10 ⁶	>1×10 ⁶	>1×10 ⁶
Breaking strength (lb/in)(n/10mm)	40/70	40/70	35/62	40/70	80/141
Elongation (% at break)	50	50	30	20	20
Electrolytic corrosion (3m test method etm 54001)	1.0	1.0	1.0	1.0	1.0
Adhesion to steel (oz/in)/(n/10mm)	65/7,1	80/8,8	80/8,7	35/3,8	45/4,9
Cti material group	I	I	I	I	I

† Operating temperature is equivalent to UL Recognition temperature where applicable (See page 15).

3M™ Electrical Tapes

Vinyl

Vinyl electrical tapes combine the flexibility of a PVC backing with excellent electrical insulating properties, high dielectric strength, and resistance to moisture and UV rays.

Fade-resistant vinyl comes in a range of colours for marking. For primary electrical insulation up to 600 volts, including wire harnessing, degaussing coils and high-voltage cables.

3M offers two types of vinyl tapes: general-purpose tapes (3M™ Temflex™ 165/175) and professional tapes (Scotch® Super 33+™, Scotch® 35, Scotch® Super 88). Tapes are available in a range of sizes, lengths, materials. Scotch® 35 and 3M™ Temflex™ 165 are available in wide range of colours, Scotch® Super 33+™, Scotch® Super 88 and 3M™ Temflex™ 175 are available only in black. From commercial and residential to industrial and power utilities, we have the insulation tape for every application.

If you need more information about Vinyl Electrical Tapes, check our website:

www.3M.co.uk/3M/en_GB/p/c/tapes/electrical/vinyl/



Non-thermosetting rubber

Vinyl Electrical Tape	Scotch® Super 33+™ Vinyl Electrical Tape 	Scotch® Vinyl Electrical Tape 35 	Scotch® Vinyl Electrical Tape Super 88 	3M™ Temflex™ Vinyl Electrical Tape 165 	3M™ Temflex™ Vinyl Electrical Tape 175 
Features	7-Mil premium black vinyl electrical tape. Offers excellent adhesion and cold weather performance. UI 510 flame retardant.	7-Mil premium vinyl tape for colour coding. Available in 9 fade- and weather-resistant colours. UI 510 flame retardant.	8.5-Mil premium black vinyl electrical tape. Offers excellent adhesion and cold weather performance. UI 510 flame retardant.	A multi-purpose, general use grade, nominal 6-mil (0.152 mm) thick electrical insulating tape composed of an elastic vinyl (pvc) film backing and coated on one side with a non-corrosive, solvent free pressure-sensitive adhesive. Available in 10 colours.	A black, high performance, general use grade, nominal 7-mil (0.178 mm) thick electrical insulating tape composed of an elastic vinyl (pvc) film backing and coated on one side with a non-corrosive, solvent-free, pressure-sensitive adhesive.
Operating temp (°C) †	80/105	80/105	80/105	80	80
Total thickness (mils)/(mm) nominal	7.0/0.178	7.0/0.178	8.5/0,0.216	6.0/0.152	7.0/0.178
Dielectric breakdown (v/mil) (min)	1000	1000	1000	1000	1000
Insulation resistance (ohms)(min)	>1×10 ¹²	>1×10 ¹²	>1×10 ¹²	>1×10 ¹²	>1×10 ¹²
Breaking strength (lb/in)(n/cm)(min)	14.4/25,3	14.6/25.6	17.8/31,2	13.2/23,1	15.4/27
Elongation (% at break)(min)	225	125	225	200	200
Adhesion to steel (oz/in)/(n/cm)(min)	20/2,2	16/1,8	18/2,0	18/2,0	18/2,0

† Operating temperature is equivalent to UL Recognition temperature where applicable (See page 15).


The second number is the maximum operating temperature

 = Flame retardant. See page 15 for product specifications.

3M™ Conductive and EMI Shielding Tapes

3M™ EMI Shielding Tapes are for applications requiring reliable point-to-point electrical contact, particularly EMI/RFI shielding, grounding and static charge draining. The tapes are easily die-cut and have a multitude of uses in electrical design and test laboratories for prototyping, design and troubleshooting.

Available in copper, aluminium, embossed, and tin-plated materials and with two (2) adhesive systems: solvent-resistant acrylic and conductive acrylic.

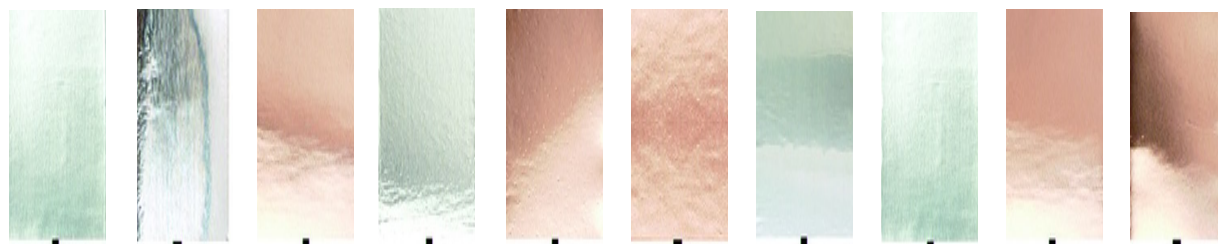

	Conductive adhesive							Nonconductive adhesive		
3M™ Conductive/ Shielding Tape	1115B	1120	1126	1170	1181	1182	1183	425	1125	1194
	UL	UL	UL	UL	UL	UL	UL		UL	UL
Features	Aluminium foil, acrylic adhesive.	Aluminium foil, acrylic adhesive.	Copper foil, acrylic adhesive.	Aluminium foil, acrylic adhesive.	Copper foil, acrylic adhesive. ¹	Copper foil, acrylic adhesive. ¹ on both sides.	Tin-plated copper foil, acrylic adhesive. ¹	Aluminium foil, acrylic adhesive.	Copper foil, acrylic adhesive.	Copper foil, non-conductive adhesive.
Roll length ³	60 Yds	36 Yds	36 Yds	18 Yds	18 Yds	18 Yds	18 Yds	60 Yds	36 Yds	36 Yds
Backing thickness (mils)(mm)	4.5 Mil (0,114 mm)	2.0 Mil (0,05 mm)	1.4 Mil (0,04 mm)	2.0 Mil (0,05 mm)	1.4 (0,04 Mm)	1.4 Mil (0,05 mm)	1.4 Mil (0,04 mm)	2.8 Mil (0,07 mm)	1.4 Mil (0,04 mm)	1.4 Mil (0,04 mm)
Total thickness (mils)(mm)	6.0 Mil (0,152 mm)	3.2 Mil (0,08 mm)	2.6 Mil (0,07 mm)	3.2 Mil (0,08 mm)	2.6 Mil (0,07 mm)	3.5 Mil (0,09 mm)	2.6 Mil (0,07 mm)	4.6 Mil (0,12 mm)	2.6 Mil (0, 07 mm)	2.6 Mil (0,07 mm)
Breaking strength (lb/in) (n/10mm)	40 Lb/in (70 n/ 10mm)	20 Lbs/in (35 n/ 10mm)	25 Lb/in (44 n/ 10mm)	20 Lb/in (35 n/ 10mm)	25 Lb/in (44 n/ 10mm)	25 Lb/in (44 n/ 10mm)	25 Lb/in (44 n/ 10mm)	28 Lb/in (4,9 n/ 10mm)	25 Lb/in (44 n/ 10mm)	25 Lb/in (44 n/ 10mm)
Adhesion to steel ⁴ (oz/in) (n/10mm)	52 Oz/in (5.6 N/ 10mm)	35 Lbs/in (3.8 N/ 10mm)	35 Oz/in (3.8 N/ 10mm)	35 Oz/in (3.8 N/ 10mm)	35 Oz/in (3.8 N/ 10mm)	35 Oz/in (3.8 N/ 10mm)	35 Oz/in (3.8 N/ 10mm)	47 Lb/in (5,1 n/ 10mm)	40 Oz/in (4,4 n/ 10mm)	40 Oz/in (4,4 n/ 10mm)
Electrical resistance ⁶ (ohms)	0.0065	0.0010	0.005	0.010	0.005	0.010	0.005	–	N/a	N/a

¹ Conductive particles in the adhesive provide the electrically conductive path between the substrate and the backing.

² The embossed pattern provides the electrically conductive path through the adhesive.

³ Multiple-length rolls and custom slit widths are available by special order.

Test methods:

⁴ ASTM D1000

⁵ Most foil shielding tapes from 3M are UL Recognised (UL) for flame retardancy per UL510A, Product Category OARC2, File E17385.

⁶ Resistance measured through the adhesive. MIL-STD-202 Method 307 maintained at 5 PSI (3,4 N/sq cm) measured over 1 sq in. surface area.

UL = Flame retardant. See page 15 for product specifications.

3M™ Conductive and EMI Shielding Tapes



Conductive-through-adhesive				Conductive adhesive
3M™ Conductive/ Shielding Tape	1245 	1267 	1345 	CN-3190
Features	Embossed copper foil, acrylic adhesive. ²	Embossed aluminium foil, acrylic adhesive. ²	Embossed tin-plated foil, acrylic adhesive. ²	Anti-corrosion metallised polyester rip-stop fabric, acrylic adhesive.
Roll length ³	18 Yds	18 Yds	18 Yds	54.5 Yds
Backing thickness (mils)(mm)	1.4 Mil (0,04 mm)	2.0 Mil (0,05 mm)	1.4 Mil (0,04 mm)	4.3 Mil (0,11 mm)
Total thickness (mils)(mm)	4.0 Mil (0,10mm)	5.0 Mil (0,13mm)	4.0 Mil (0,10mm)	5.8 Mil (0,14mm)
Breaking strength (lb/in)(n/10mm)	25 Lb/in (44 n/10mm)	20 Lb/in (35 n/10mm)	25 Lb/in (44 n/10mm)	40 Lb/in (70 n/10mm)
Adhesion to steel ⁴ (oz/in)(n/10mm)	35 Oz/in (3.8 N/10mm)	35 Oz/in (3.8 N/10mm)	45 Oz/in (5.0 N/10mm)	30 Oz/in (3.3 N/10mm)
Electrical resistance ⁶ (ohms)	0.001	0.005	0.001	0.05

¹ Conductive particles in the adhesive provide the electrically conductive path between the substrate and the backing.

² The embossed pattern provides the electrically conductive path through the adhesive.

³ Multiple-length rolls and custom slit widths are available by special order.

Test methods:

⁴ ASTM D 1000


⁵ Most foil shielding tapes from 3M are UL Recognised () for flame retardancy per UL510A, Product Category OARC2, File E17385.

⁶ Resistance measured through the adhesive. MIL-STD-202 Method 307 maintained at 5 PSI (3,4 N/sq cm) measured over 1 sq in. surface area.

 = Flame retardant. See page 15 for product specifications.

3M™ Speciality Tapes

These tapes have a multitude of uses in component design and manufacturing as well as to support the insulation of components.

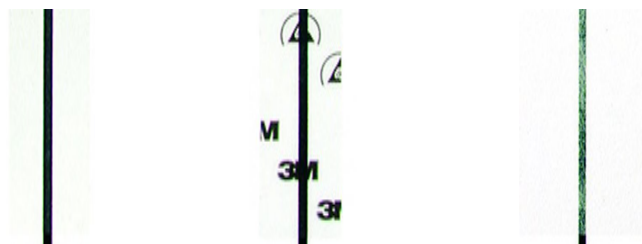

General use/antistatic			Miscellaneous
3M™ Special Use Tapes	40 	40PR 	1157R
Features	General-use utility tape, 1-mil clear polyester film backing, anti-static conductive polymer adhesive.	General-use utility tape, 1-mil clear polyester film backing, anti-static conductive polymer adhesive. With preprinted static symbol.	Tape with non-woven mat allow thorough penetration of the impregnating resin inside bobbin-wound coils.
Backing description	Film	Film	Rayon fibre mat
Breaking strength (lb/in)/(N/10mm)	20/35	20/35	Tensile strength (8.5 Lbs/in (14.8 N/10mm))
Adhesion to steel (oz/in)/(N/10mm)	15/1,7	15/1,7	1.2/10
Static charge Generation at 50% RH	Remove from roll (volts)	5	N/a
	Remove from stainless steel (volts)	5	N/a
Adhesive	Conductive polymer	Conductive polymer	Acrylic
Operating temperature (°C)			
Total thickness (mils)/(mm)	2.2 Mil/0,056	2.2 Mil/0,056	4.0/0,102

The symbol shown is the industry standard ESD Protective Symbol which is used to identify items that provide electrostatic discharge protection.

Industry specifications

3M™ Electrical Insulating Tapes for electrical device applications

 UL Recognised components in UL File E17385, product Category OANZ2

Specification	Tape number	Type
For use at temperatures not to exceed 130°C	3M™ Composite Film Tape 44 3M™ Composite Film Tape 44D-A 3M™ Composite Film Tape 44HT 3M™ Composite Film Tape 44T-A 3M™ Composite Film Tape 55	Composite film
	3M™ Polyester Film Tape 5 3M™ Polyester Film Tape 54 3M™ Polyester Film Tape 56 3M™ Polyester Film Tape 57 3M™ Polyester Film Tape 58 3M™ Polyester Film Tape 74 3M™ Polyester Film Tape 75 3M™ Polyester Film Tape 1318-1 3M™ Polyester Film Tape 1350F-1 3M™ Polyester Film Tape 1350F-2 3M™ Polyester Film Tape 1350T-1 3M™ Polyester Film Tape 1350T-3 3M™ Polyester Film Tape 1351-1 3M™ Polyester Film Tape 1388-1	Polyester film
	3M™ Filament Tape 46 3M™ Filament Tape 1039 3M™ Filament Tape 1046	Filament reinforced

3M™ Electrical Insulating Tapes for electrical device applications

 UL Recognised components in UL File E17385, product Category OANZ2

Specification	Tape number	Type
For use at temperatures not to exceed 150°C	3M™ Glass Cloth Tape 27	Glass cloth
For use at temperatures not to exceed 155°C	3M™ Epoxy Film Tape Super 10 3M™ Polyimide Film Tape 1205	Epoxy film Polyimide film
For use at temperatures not to exceed 180°C	3M™ Polyimide Film Tape 92 3M™ Polyimide Film Tape 1218	Polyimide film
For use at temperatures not to exceed 200°C	3M™ Polyimide Film 98C-1 3M™ Glass Cloth Tape 69	Polyimide film Glass cloth

3M™ and Scotch® Electrical Tapes

Military**

Specification	Previously known as	Tape number	Type
A-A-59770A (Type MFT 2.5)	MIL-15126F	3M™ Polyester Film Tape 54 3M™ Polyester Film Tape 56	Polyester film
A-A-59770A (Type MFT 3.5)	MIL-15126F	3M™ Polyester Film Tape 57 3M™ Polyester Film Tape 58	Polyester film
A-A-59770A (Type MF 2.5)	MIL-15126F	3M™ Polyester Film Tape 5 3M™ Polyester Film Tape 1318-1 3M™ Polyester Film Tape 1350F-1 3M™ Polyester Film Tape 1351-1	Polyester film
A-A-59770A (Type ACT)	MIL-15126F	3M™ Acetate Cloth Tape 11 3M™ Acetate Cloth Tape 28	Acetate cloth
MIL-I-19166C		3M™ Glass Cloth Tape 69	Glass cloth

Tape dimensions

Contact your 3M sales representative or customer service for information.

* Other tape lengths may be available; contact your 3M sales representative or customer service for information.

† These tape charts are intended to serve as comparative guides for tape selection purposes. All property values shown are typical and are not intended for specification purposes. They are based on tests performed in accordance with ASTM D1000, except Electrolytic Corrosion Factor, which is a 3M test method available on request. Proposed specifications detailing maximum and minimum values are also available on request.

** Confirmed as of June 16, 2023.

About 3M™ Insulating and Conductive Tapes

Recommended thermosetting time and temperatures for adhesive systems

Time	Rubber	Acrylic	Silicone
1 hour	150°C (300°F)	150°C (300°F)	–
2 hours	135°C (275°F)	135°C (275°F)	–
3 hours	120°C (250°F)	120°C (250°F)	260°C (500°F)
24 hours	–	–	260°C (500°F) (for maximum solvent resistance)

Thermal setting data not applicable to conductive tapes with acrylic adhesives.

Tape adhesives

Thermosetting Rubber (TR): Thermosetting rubber adhesives have high initial adhesion and electrical purity. When properly thermoset, a thermosetting rubber adhesive system provides more aggressive adhesion and bonding, higher solvent resistance, and higher heat resistance.

Acrylic (A): Acrylic adhesives have high solvent resistance and do not require pre-baking or thermosetting because they are made from synthetic polymers specifically formulated to resist heat, oxidation, solvents and oils, and exhibit acceptable performance in many applications without a cure cycle.

Silicone (ST): Silicone adhesive systems are for high temperature applications because they have exceptional heat resistance, are inorganic, require higher temperatures for the thermosetting reaction, and, if burned, leave a nonconductive residue.

Product shelf life

All 3M™ Electrical Tapes have a 5-year shelf life (excluding 3M™ 40 tape) following the date of manufacture. It is 3M's standard procedure to ship any product with at least two years of its shelf life remaining. Any special request for a specific shelf life requirement may require a larger-than-stated minimum order quantity (MOQ) that justifies a non-scheduled product run. Contact your 3M sales representative for specific shelf life and minimum order quantity requirements. (No product returns will be accepted on special shelf life request orders.)



Slitting

Precision slitting $\pm 0.005"$ (0.127 mm) may be available for some tapes upon request. The minimum width for this service is 0.125" (3.175) and the maximum width is 2.000" (50.8mm). Standard slitting tolerances are dependent on the type of backing. All tapes have a width tolerance of $\pm 1/64"$, with the exception of some polyesters, vinyl, acetate, and glass cloth which have a tolerance of $\pm 1/32"$.

Other 3M tape solutions

Customer Plant Survey: 3M will provide a technically trained sales professional who can survey your plant, manufacturing procedures, equipment and tapes, and suggest ways to help you improve your product cost effectiveness and make your plant more efficient – all at no cost to you. Ask your 3M representative for more details.

ISO registration

The 3M facilities which manufacture the insulating and conductive tapes in this publication have been registered by Underwriters Laboratories, Inc. to the International Standards Organisation (ISO) 9001 quality management system standard. (Some facilities may be certified to ISO-9002 standards. Contact 3M to confirm, if necessary). For the customer, registration provides proof of the quality of suppliers' systems. For companies with numerous manufacturing sites, such as 3M, ISO registration provides a consistent and efficient method of standardisation. Prior to actual use, the product label and/or Safety Data Sheet should be reviewed.

Log only products

The following 3M™ Tapes are not available in slit rolls: 12, 44D-A, 44T-A, 55, 98C-1, 1157R, 1318, 1350F, 1351, 1388-1, Super 10. These products must be purchased through an authorised slitter/distributor.

Industry standard test methods

This publication is a comparative guide for tape selection purposes. All property values shown are average (typical) and are not intended for specification purposes. With the exception of Electrolytic Corrosion Factor, which is a 3M Test Method, the properties are based on tests performed in accordance with recognised industry standard procedures:

- ▶ ASTM-D1000 Test methods for pressure-sensitive adhesive-coated tapes used for electrical and electronic applications

Other quality 3M electrical products

3M makes exceptional high-temperature flexible insulation products, heat shrink tubing and molded shapes, liquid resins and wire management products for electrical and electronic applications. For complete information, go to www.3M.com/electrical/oem



Tape construction

Smooth foil backings with conductive adhesive

3M™ EMI Shielding Tapes 1170 (aluminium), 1181 (copper), and 1183 (tin-plated copper) are smooth-backed foil tapes that establish secure electrical contact with the application surface by means of a unique adhesive. Broadly distributed conductive particles in the adhesive provide a multitude of low-resistance paths between the backing and the substrate. (Figure 1)

Embossed foil backings

The backings of 3M™ Shielding Tapes 1245 (copper), 1267 (aluminium), and 1345 (tin-plated copper) are impressed with an embossed pattern (Figure 2) that protrudes through the acrylic adhesive to make direct electrical contact with the application surface. This reliable 'through-the-adhesive' conductivity system provides stable contact resistance and a high level of shielding effectiveness.

Tin-plated foil backings

The copper used in 3M™ EMI Shielding Tapes 1183 (smooth backing) and 1345 (embossed backing) is plated on both sides with tin to provide excellent solderability and resistance to corrosion and oxidation, but will remain conductive if oxidation does occur.

Conductive adhesive on both sides

3M™ Shielding Tape 1182 is a copper foil tape coated on both sides with conductive acrylic adhesive. This unique construction offers an excellent method of grounding and bonding conductive surfaces. It also exhibits low thermal resistance. 3M™ tape 1182 is supplied with a removable liner on each side for ease of handling.

Smooth foil backing with nonconductive adhesive

3M™ Shielding Tape 1194 is a smooth-backed copper tape that features the same high quality solvent-resistant, acrylic adhesive as other 3M™ foil tapes. Good solderability makes it an economical choice for applications like connector and cable shielding, grounding, electrostatic shielding between transformer windings, outer wrap for coils and attachment of connector tabs on rolled film-and-foil capacitors

Conductive fabric tape

3M™ Fabric Tape CN-3190 is an anti-corrosion polyester ripstop fabric backing with an electrically conductive acrylic adhesive. It provides effective copper-nickel shielding with excellent flexibility and conformability as well as lightweight and high strength.

Adhesive

Both the conductive and nonconductive versions use the same acid-free, corrosion-resistant acrylic resin.

Figure 1 Smooth backing with conductive adhesive



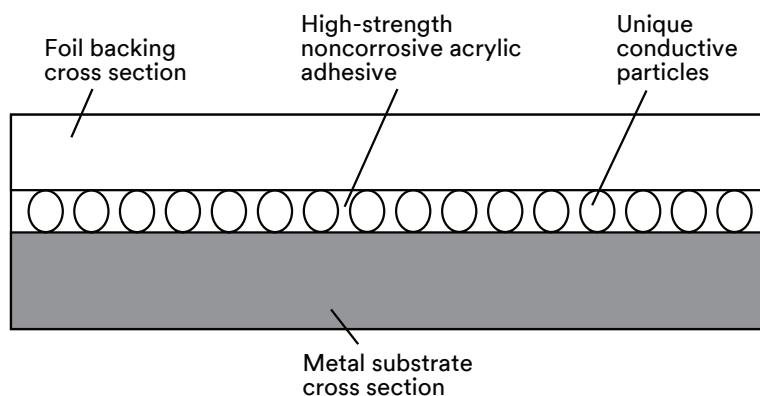


Figure 2 Embossed backing with "through-the-adhesive" contact

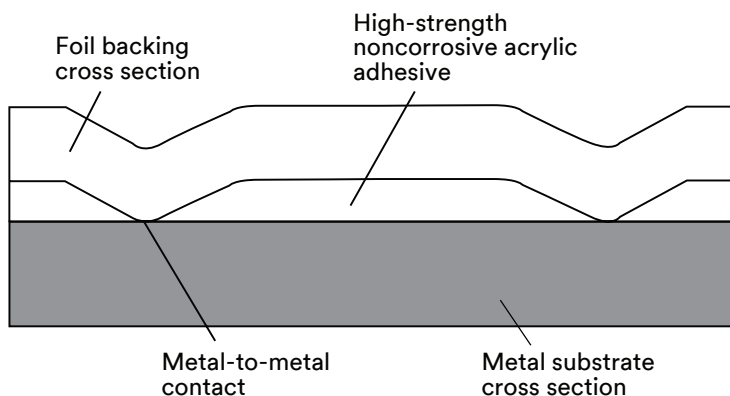

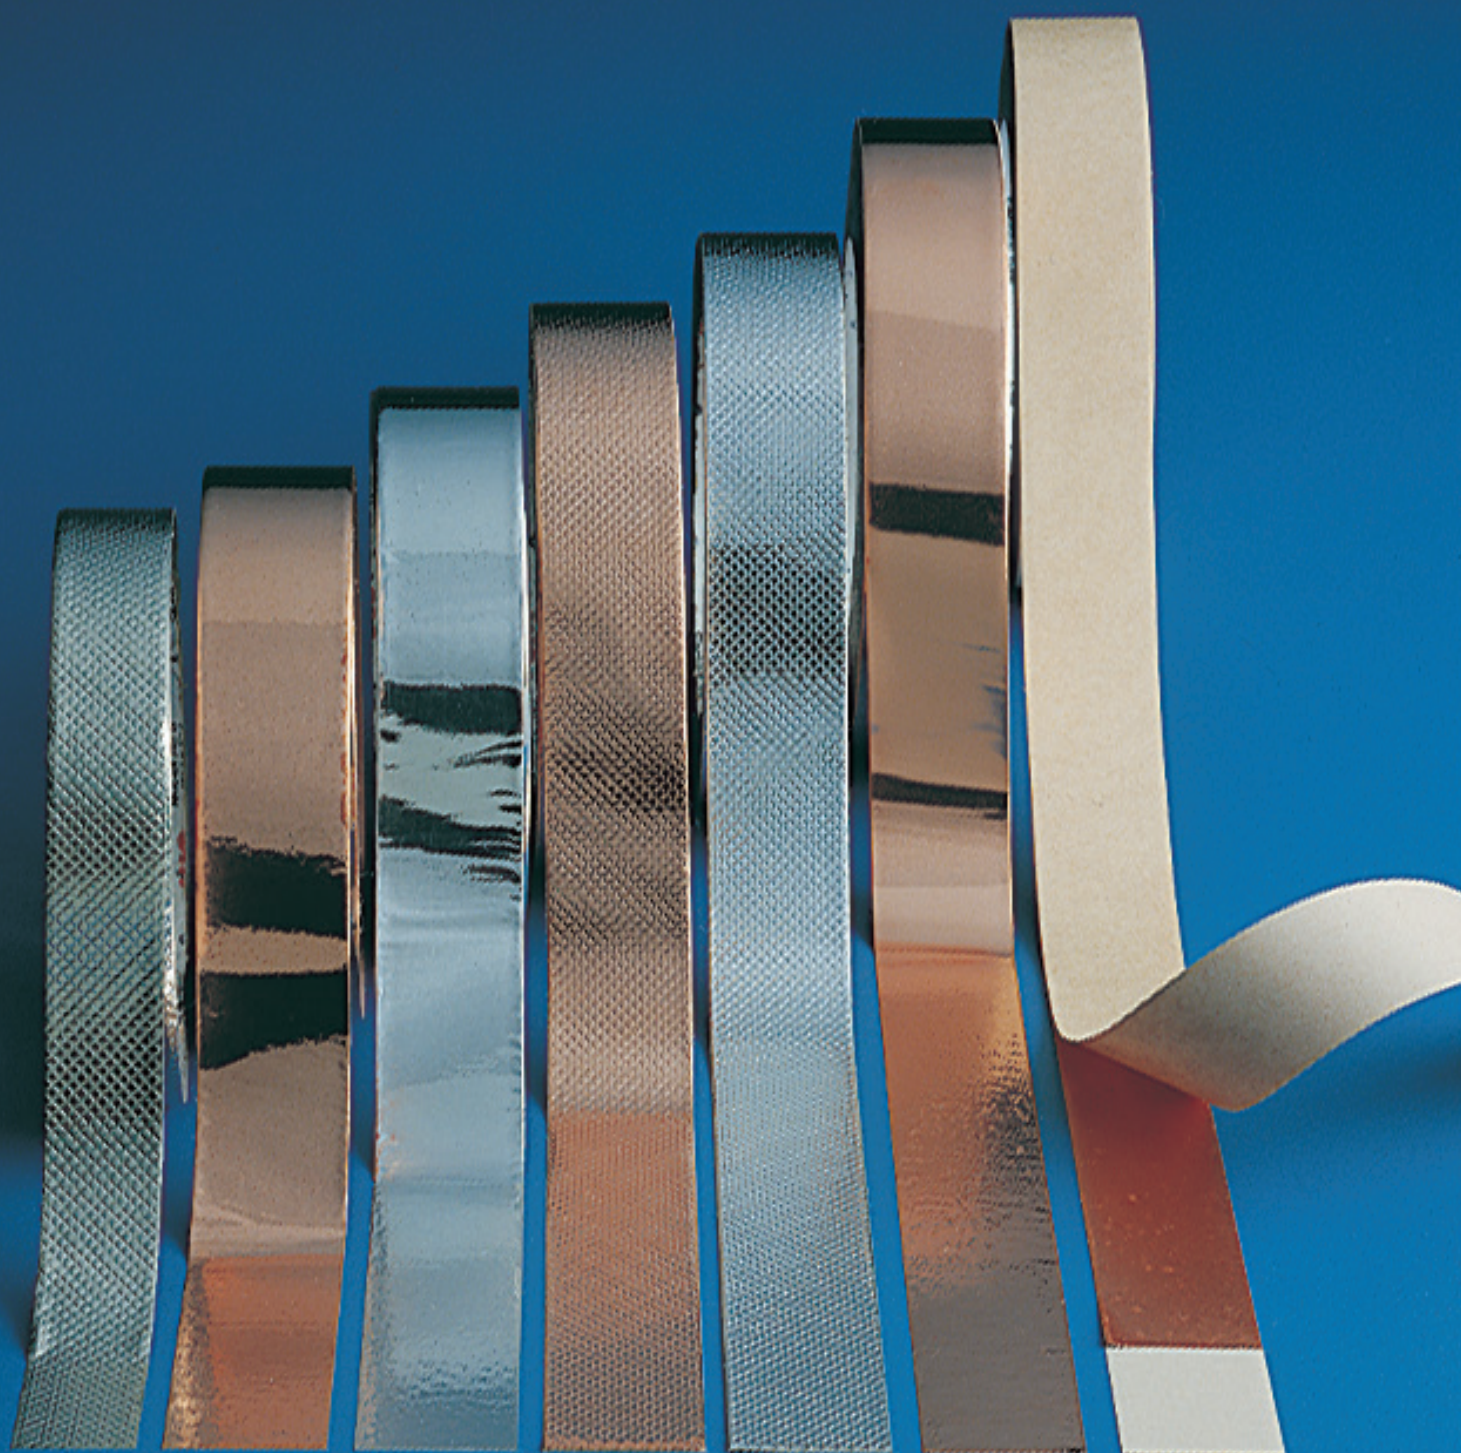

3M™ Flexible Insulation products

3M™ Flexible Insulation

Products potential applications:

- ▶ Ground, phase and interwinding insulation for dry-type transformers
- ▶ Slot, phase and wedge insulation for electric motors and generators
- ▶ Flame barrier insulation for appliances
- ▶ Collars for voice coils used in loudspeakers
- ▶ Wire and cable wrap
- ▶ Layer insulation used in cast coil transformers

3M™ ThermaVolt Calendared Inorganic Insulating Paper

3M™ ThermaVolt Calendared Insulating Paper is an inorganic-based paper with high thermal conductivity that helps achieve the heat dissipation required in most of today's electrical apparatus. That allows more efficient operation or the design of smaller, more cost-effective equipment. 3M™ Thermavolt AR paper combines the advantages of 3M™ ThermaVolt paper with improved mechanical properties.

3M™ CeQUIN Inorganic Insulating Paper, laminates and boards

3M™ CeQUIN Inorganic Insulating Paper is 3M's highest inorganic-content paper, comprised primarily of glass fibres and microfibres, inorganic fillers, and less than 10% organic materials. It is for high-temperature electrical insulation applications up to Class 220(R) and is a highly flexible paper. This is available in a modified version with higher mechanical strength as well as in laminate and board form.

3M™ TufQUIN Hybrid Insulating Paper

3M™ TufQUIN Hybrid Insulating Paper is a tough, flexible, and conformable paper with good dielectric characteristics and thermal conductivity. It is also available in laminate form, as well as a form that maintains conformability at high thickness.

3M™ Flexible Insulation Products are also available in laminate form, as two-ply and three-ply using polyester film. Ask your 3M sales representative or authorised distributor for details.

Benefits

1

Thermal conductivity

The high thermal conductivity of inorganic papers helps achieve the heat dissipation required in most of today's electrical apparatus, allowing more efficient operation or the design of smaller, more cost-effective equipment.

2

Voltage endurance

3M™ Inorganic Insulating Materials retain a high percentage of dielectric strength even after extended exposure to high operating temperatures while its inorganic content helps reduce damage caused by partial discharge.

3


Low moisture absorption

Inorganic papers exhibit dimensional stability, even in humid environments. It does not require extended drying time prior to varnish saturation.

4

Varnish absorption

The good varnish absorption characteristics of inorganic paper can enhance its already high thermal conductivity, so that your equipment can run cooler, quieter and last longer.

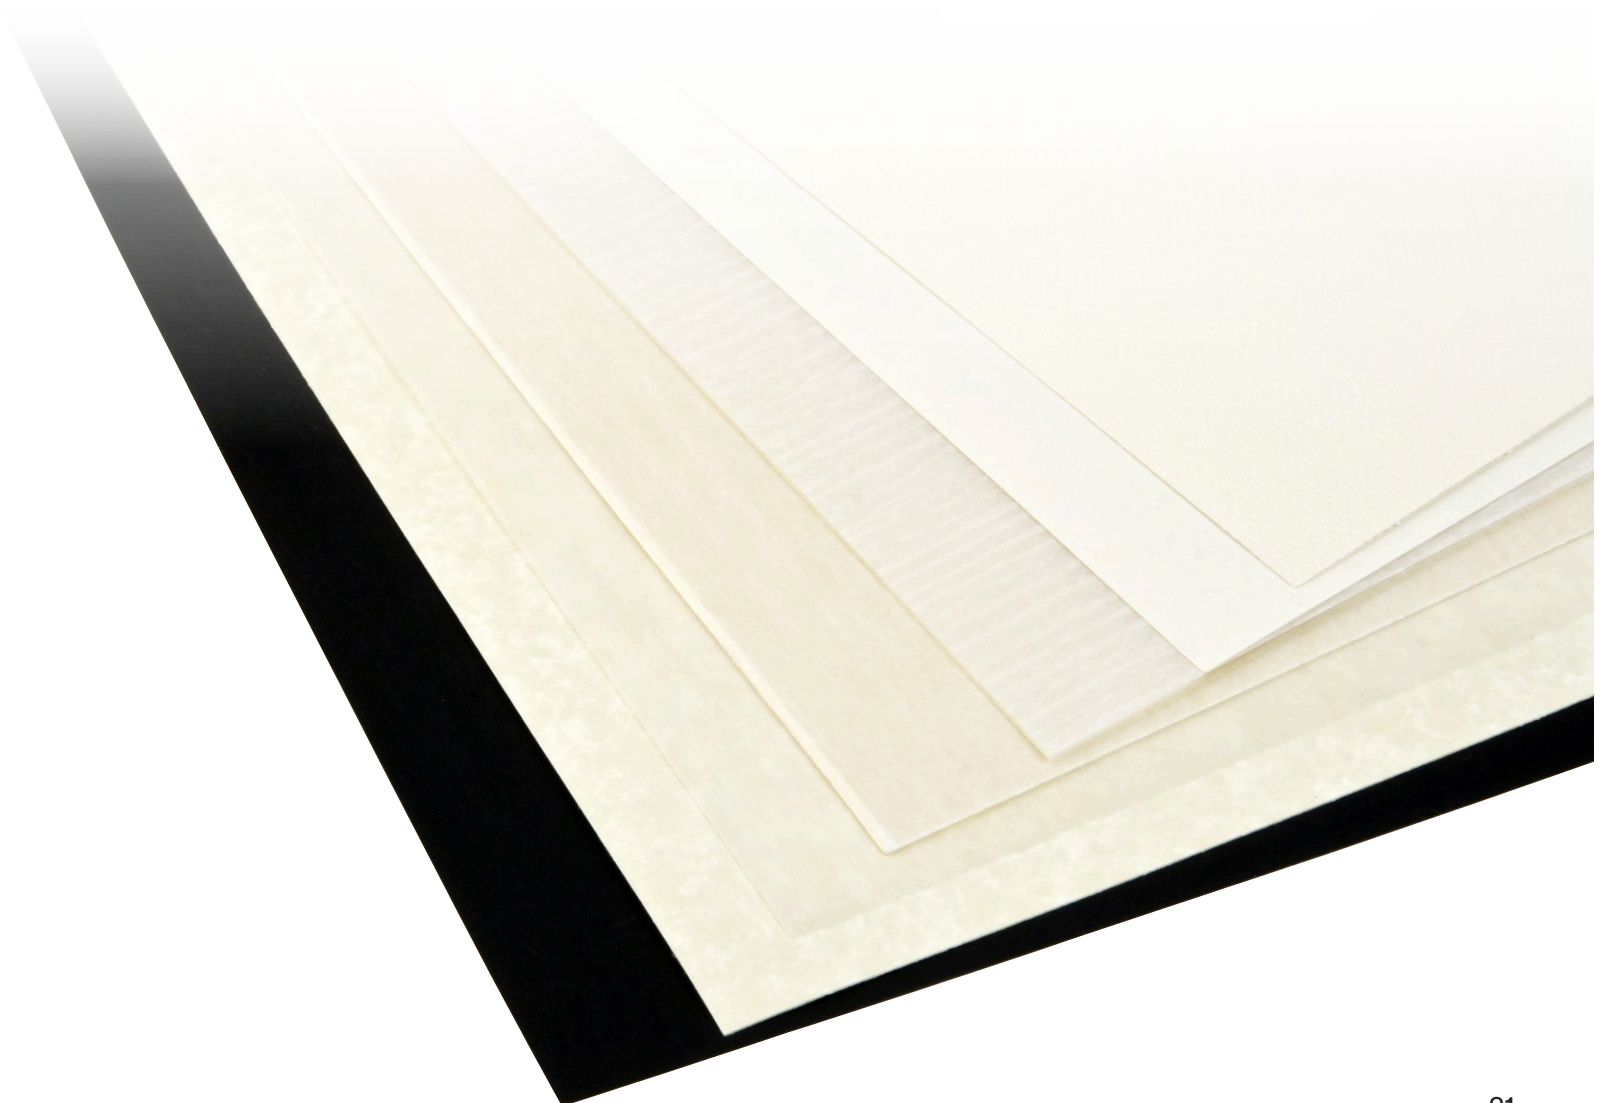

Authorized Distributor:



MaterialPartner Technische Werkstoffe GmbH ☎ Tel: +43 (0) 2256 65 888
Kurze Gasse 5-7 2544 Leobersdorf | Austria ✉ Mail: info@materialpartner.eu
Company registration: FN 408274d 🌐 www.materialpartner.eu

UL and RN are registered trademarks of Underwriters Laboratories, Incorporated.
CSA is a registered trademark of Canadian Standards Association.

Product Selection and Use: Many factors beyond 3M's control and uniquely within user's knowledge and control can affect the use and performance of a 3M™ product in a particular application. As a result, customer is solely responsible for evaluating the product and determining whether it is appropriate and suitable for customer's application, including conducting a workplace hazard assessment and reviewing all applicable regulations and standards (e.g., OSHA, ANSI, etc.). Failure to properly evaluate, select, and use a 3M™ product in accordance with all applicable instructions and with appropriate safety equipment, or to meet all applicable safety regulations, may result in injury, sickness, death, and/or harm to property.

Warranty, Limited Remedy, and Disclaimer: Unless a different warranty is specifically stated on the applicable 3M™ product packaging or product literature (in which case such warranty governs), 3M™ warrants that each 3M™ product meets the applicable 3M™ product specification at the time 3M™ ships the product. 3M™ **MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR ARISING OUT OF A COURSE OF DEALING, CUSTOM, OR USAGE OF TRADE.** If a 3M™ product does not conform to this warranty, then the sole and exclusive remedy is, at 3M's option, replacement or repair of the 3M™ product or refund of the purchase price. Warranty claims must be made within one (1) year from the date of 3M's shipment.

Limitation of Liability: Except for the limited remedy stated above, and except to the extent prohibited by applicable law, 3M™ will not be liable for any loss or damage arising from or related to the 3M™ product, whether direct, indirect, special, incidental, or consequential (including, but not limited to, lost profits or business opportunity), regardless of the legal or equitable theory asserted, including, but not limited to, warranty, contract, negligence, or strict liability.

Disclaimer: 3M™ industrial and occupational products are intended, labeled, and packaged for sale to trained industrial and occupational customers for workplace use. Unless specifically stated otherwise on the applicable product packaging or literature, these products are not intended, labeled, or packaged for sale to or use by consumers (e.g., for home, personal, primary or secondary school, recreational/sporting, or other uses not described in the applicable product packaging or literature), and must be selected and used in compliance with applicable health and safety regulations and standards (e.g., U.S. OSHA, ANSI), as well as all product literature, user instructions, warnings, and limitations, and the user must take any action required under any recall, field action or other product use notice. Misuse of 3M™ industrial and occupational products may result in injury, sickness, or death. For help with product selection and use, consult your on-site safety professional, industrial hygienist, or other subject matter expert. For additional product information, visit www.3M.com.



Electrical Markets Division

3M Deutschland GmbH
Carl-Schurz-Straße 1
41453 Neuss
+49 2131-140
www.3Mdeutschland.de

3M Österreich GmbH
Am Europlatz 2
1120 Vienna
Tel: 0043/1/86 686-0
www.3MAustria.at

3M (Schweiz) GmbH
Eggstrasse 91
8803 Rüschlikon
+41 44 724 90 90
www.3MSchweiz.ch

3M Belgium
Hermeslaan 7
1831 Diegem
+32 2 722 5111
www.3Mbelgie.be

3M Nederland B.V.
Schenkkade 50K
2595 AR Den Haag
+31 15 782 2333
www.3Mnederland.nl

3M Poland Sp. z o.o.
Al. Katowicka 117
05-830 Nadarzyn
tel. (22) 739 60 00
www.3M.pl

3M Česko, spol. s r.o.
V parku 2343/24
148 00 Praha
+420 261 380 111
www.3M.cz

3M Magyarország Kft
Neumann János u. 1/E
1117 Budapest
+36 1 270 7777
www.3M.hu